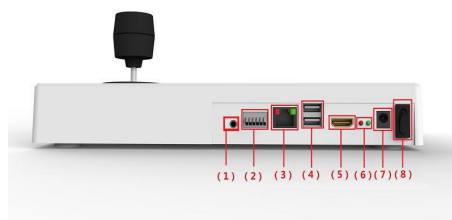



SPECIFICATION :

Para	Model	KT401
System		
Main processor		High performance embedded processor
Operating system		Embedded Linux
Audio		
Audio input		/
Audio output		1CH
Audio compression standard		G.711a
Video		
Decoding method		H.264
Decoding resolution		Support 4K/5MP/3MP/1080P/960P/720P local preview remote image, four images display
Interface		
RS232 interface		Support
RS485 interface		Support
Network interface		1 RJ45 100M Adaptive Ethernet
HDMI interface		Support
USB interface		2 USB 2.0(support mouse control)
Auxiliary device		
Remote control rocker		Support 3D rocker control
Display screen		Adopt 7 inch 800*480 LCD display screen
Other		
Operating temperature/humidity		-10°C ~ 55°C/10 % -90 %
Power supply		DC12V (Power plug specification optional)
Device power		≤6W
Device dimension		280*170*40mm
device weight		1.1KG

FEATURES :

- ◆ Adopt 7 inches 800*480 LCD
- ◆ Adopt 3D control rocker
- ◆ Support H.264 decoding
- ◆ Support PTZ, preset/cruise/pattern operation
- ◆ Support configuration and calling of preset/cruise/pattern
- ◆ Support preview image on the keyboard directly
- ◆ Support remote video keyboard local playback or playback to TV wall
- ◆ Support shortcut operations to the wall
- ◆ Administrators and operators and other multi-level user permission control
- ◆ Support U disk upgrading, network upgrading
- ◆ Support automatic search device within the same network segment
- ◆ Support domain method to add network device
- ◆ Support import and export of keyboard configuration parameter
- ◆ Support the remote configuration and maintenance for the device that have been added
- ◆ Support audio output
- ◆ Support network access DVR/NVR/Dome camera/IPC/Decoder

Backboard :

INTERFACE :

- 1.Audio output
- 2.RS232+RS485
- 3.RJ45
- 4.USB interface
- 5.HDMI
- 6.The data transceiver indicator light
- 7.DC12V
8. Power switch

All Info. only for reference,please see the subject produce.Any change will not be notified